

SRIMD204 NONHERMETIC WIRED PLASTIC SHELL MICRO-D PLUG CONNECTOR

REVISIONS			
REV	CHANGE NO.	DATE	CFG APPROVAL
-	INIT RLSE	07-02-15	J. PETRI

1. MATES WITH HERMETIC MICRO-D FEEDTHROUGH SRIMD5001.


2. AVAILABLE PIN COUNTS: 9, 15, 21, 25, 31, 37, 51, 100

3. MATERIALS:

- a. SHELL: POLYETHERETHERKETONE (PEEK)
- b. CONTACT: BERYLLIUM-COPPER
- c. HARDWARE: STAINLESS STEEL
- d. RIBBON CABLE: 28AWG, KAPTON INSULATED

4. ORDERING INSTRUCTIONS:
SPECIFY BASE NUMBER FOLLOWED BY DASH NUMBERS INDICATING PIN COUNT AND CABLE LENGTH:

EXAMPLE: SRIMD204 - 9 - 2
 _____ CABLE LENGTH = 2 FEET (SPECIFY IN ONE FOOT INCREMENTS)
 _____ PIN COUNT = 9
 _____ BASE NUMBER

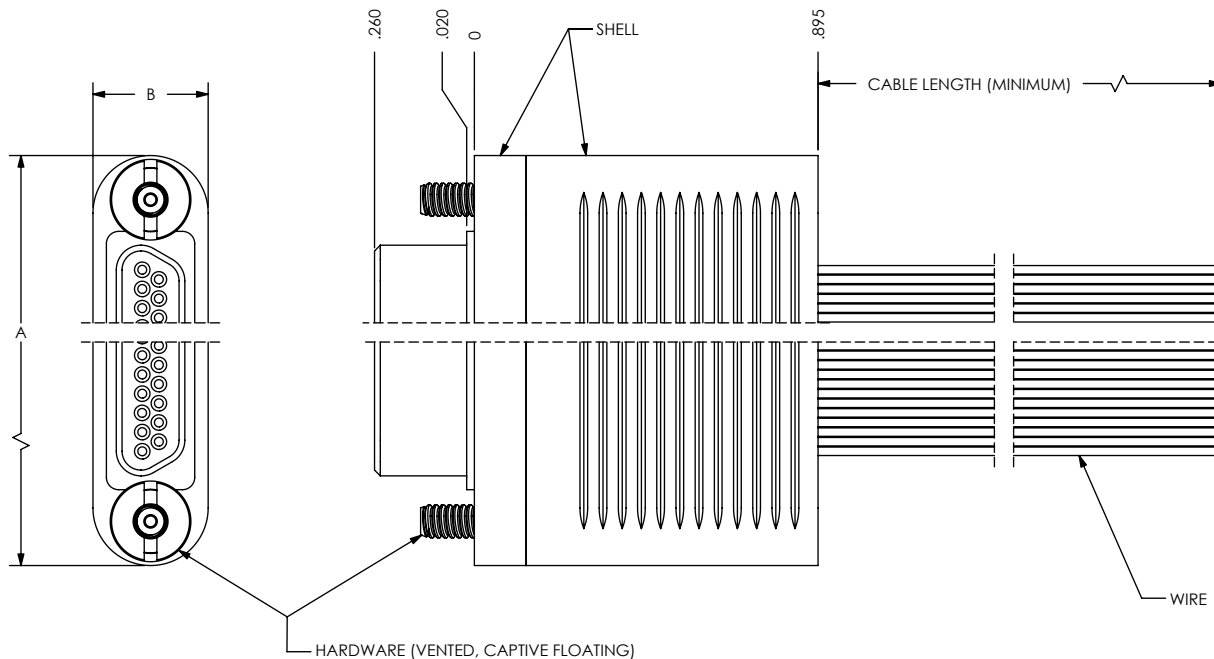

PART NUMBER	A	B
SRIMD204-9-()	0.795	0.300
SRIMD204-15-()	0.945	0.300
SRIMD204-21-()	1.095	0.300
SRIMD204-25-()	1.195	0.300
SRIMD204-31-()	1.345	0.300
SRIMD204-37-()	1.495	0.300
SRIMD204-51-()	1.445	0.343
SRIMD204-100-()	2.180	0.387

UNLESS OTHERWISE SPECIFIED
 DIMENSIONING IAW ASME Y14.5M-1994
 DIMENSIONS APPLY AFTER PROCESSES
 DIMENSIONS IAW US CUSTOMARY UNITS
 .X ± .1, .XX ± .01, .XXX ± .005, ∠ ± .5°
 .010 MAX OUTSIDE R., .005 MAX INSIDE R
 125 RMS SURFACE FINISH

SRI HERMETICS (321) 254-4067
 WWW.SRIHERMETICS.COM

TITLE
 CONNECTOR, MICRO-D, HI-VAC NONHERMETIC PLUG

THIRD ANGLE PROJECTION

SIZE A	DOCUMENT SRIMD204	REV -
SCALE 2:1	CAGE CODE 3PJY7	SHEET 1 OF 1